

Unilumin Upad III P3.9 - designed for indoor highest quality projects and the most demanding users.



High resolution makes it, a perfect screen for viewing complicated shots with a lot of details. Easy installation and own stable and precise construction cause that it great for trade fairs or product presentations. Thanks to the highest possible parameters, like contrast, refresh rate: 3840Hz, and noiseless running – Upad III is the perfect solution for every top event. Recommended especially there, where image quality and resolution are most important.

Model	Upad III P3.9
Technology	SMD
Pixel density (1m <sup>2</sup> )	256 x 256
Cabinet size (cm)	50x50
Brightness (cd/m <sup>2</sup> )	1000
Refresh rate (Hz)	3840
Grey level (bit)	12
Cabinet weight (kg)	9
Max energy consumption for 1 cabinet (W)	120
Average energy consumption for one cabinet (W)	40
Cabinet thickness (cm)	9
Material	Aluminium
Environment	Indoor
Resistance / ingress protection	IP30
Curvable (degrees)	-10 / +5
Maintenance	Front / Rear
Magnetic modules	Yes



Unilumin Upad III P3.9 – features:

- resolution 1sqm: 256pix / 256pix
- resolution of cabinet: 128 x 128 pix
- front and rear service with special tool
- magnetic modules
- curvable with extraordinary precision: -10° / -5° / -2° / +2° / +5°
- 90° option with special frames – possibility to build a cube without a gaps ([LINK](#))
- fast power supply replacement
- weight: 36kg / 1sqm
- cabinet size: 50x50cm
- watch the movie ([LINK](#))

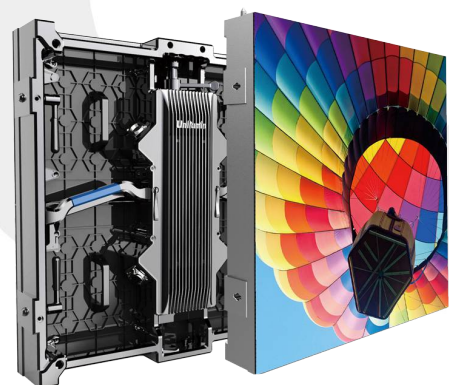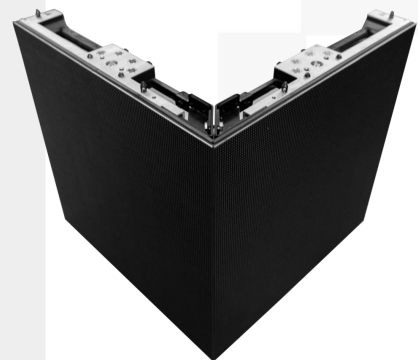



## CONTACT

---

CEO Michał Płócienniak  
+48 791 01 03 05  
mail: [michal@visualsupport.pl](mailto:michal@visualsupport.pl)

Invoices  
Visualsupport Michał Płócienniak  
ul. Jesionowa 15/1  
30-221 Kraków, Poland  
VAT EU: PL6772173198

Warehouse:  
Visualsupport  
ul. Kocmyrzowska 13b  
31-750 Kraków, Poland